


# Workhorse SRT

High Capacity Synthetic Rope Thimble

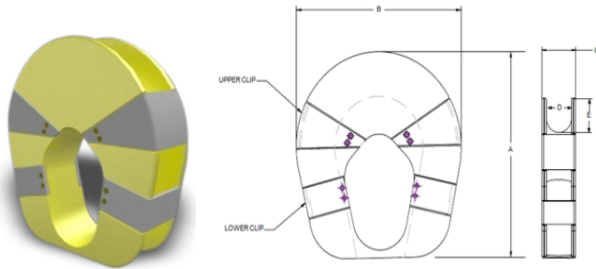

## Features

- Individually traceable
- MBL exceeds corresponding diameter HMPE ropes 100% rope protection at eye
- Detachable clips = inserts into existing eyes
- 3:1 D/d ratio maximizes grommet strength

## Specifications

Rope Diameter (in)	Working Load Limit (tons)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight (lbs)
1.5 – 2	355.0	12.339	11.550	3.452	2.200	2.775	26
2 – 2.5	522.4	14.556	14.250	4.00	2.750	3.375	56
2.5 – 3	732.0	17.333	16.950	4.550	3.300	3.975	99
2.75 – 3.25	874.8	19.723	18.300	4.825	3.575	4.275	133
3 – 3.5	1038.8	21.207	20.325	5.238	3.850	4.725	176
3.5 – 4	1246.5	23.184	22.350	5.650	4.400	5.175	230
4 – 4.5	1631.3	25.658	25.725	6.338	4.950	5.925	323
4.5 – 5	1884.7	28.199	27.750	6.750	5.500	6.375	400